

CHAINWAY®

C66

Handheld Computer

More Powerful, More Extensible, More
Advanced in Every Way



www.chainway.net

CHAINWAY®



C66

Handheld Computer

Chainway C66 is a new generation rugged handheld computer that is more advanced in every way. Built with more powerful configurations, larger display, outstanding power performance, full and complete accessories, as well as stronger extensibility to enable more possibilities, you can find this easy-to-deploy device an exceptionally valuable helper to increase working efficiency and productivity.



Android 7.1
Android 9.0 (coming soon)



Qualcomm
1.8 / 2.0 GHz Octa-core



5.5-inch IPS Display



Removable Battery
(4300mAh)



Support QC 3.0 18W
Quick Charge



Optional Trigger Handle
(Extended 5200mAh Battery)



Support RFID Sled R6
(Optional)



Optional UHF RFID
(coming soon)



Comprehensive Range
of Accessories



Barcode Scanning
NFC

1

C66 + Trigger Handle

(Optional)

C66 supports optional trigger handle. A button is located at fingertip area of handle for easy operation. And the built-in 5200 mAh battery greatly expands the power of the whole device and allows high flexibility.



3

C66 + R6

(Optional)

C66 can be paired with R6 UHF sled for a complete one-piece RFID solution. R6 with embedded Impinj R2000 chip enables read range of over 10m outdoors. Whenever only barcode scanning is needed, R6 can be detached with ease, returning C66 to be a lightweight handheld computer.




2

C66 + UHF RFID

(Optional)

Supports optional RFID module for powerful UHF performance. Configured with Impinj R2000 chip and circular polarized antenna, it delivers high read rate and wide read scope to enable the fulfillment of various tasks.



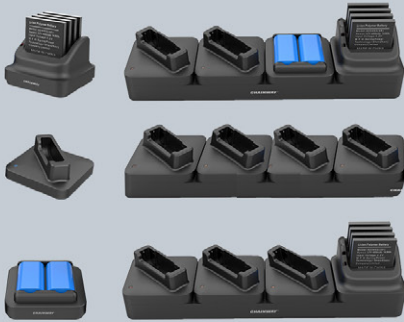

4

Charging Cradles

(Optional)

C66 offers various charging cradle options that include single charging cradle, 4-slot battery charger, 2-slot handle battery charger, and several types of 4-slot charging cradles.

5

Hand Strap (Optional)

The ergonomically designed hand strap delivers comfort and easy operation, effectively reducing accidental drops.

Rubber Bumper (Optional)

The optional rubber bumper can provide extra protection to the device to make it withstand drops from 2.4m and greatly enhance the anti-fall performance. Even in harsh outdoor use, there is no fear of damage.



6

Vehicle Charging Cradle

(Optional)

Specially designed for C66, safe and reliable, and can be easily installed on the center console of a vehicle to ensure total protection for the user and the device.



Specification

Physical Characteristics

Dimensions	160 x 76 x 15.5 mm / 6.3 x 2.99 x 0.61 in
Weight	287g / 10.12oz (host with battery)
Keypad	1 power key, 2 scan keys, 2 volume keys, 1 PTT key
Battery	4300mAh removable main battery, 5200mAh optional pistol battery, support QC3.0 and RTC
	Standby: over 300 hours (only main battery)
	Continuous use: over 12 hours (depending on user environment)
	Charging time: 2.5 hours (charge device by standard adaptor and USB cable)
Speaker	Support
Vibrator	Support
Microphone	2 Microphones, 1 for noise reduction
Display	5.5-inch high definition full display (18:9), IPS LTPS 1440*720
Touch Panel	Corning Gorilla Glass, multi-touch panel, gloves and wet hands supported
Sensor	Distance sensor, light sensor, gravity sensor, vibration motor
Indicator LED	Power, charging, status indicator
Card slot	2 slot for SIM card, 1 slot for TF card
Interfaces	USB3.0, Type-C, OTG, extended thimble

Performance

CPU	Qualcomm 2.0GHz Octa-core Qualcomm 1.8 GHz Octa-core
RAM+ROM	2GB + 16GB / 3GB + 32GB
Expansion	Supports up to 128 GB Micro SD card

Developing Environment

Operating System	Android 7.1 / Android 9.0
SDK	Chainway Software Development Kit
Language	Java
Tool	Eclipse/Android Studio

User Environment

Operating Temp.	-20°C~+50°C
Storage Temp.	-40°C~+70°C
Humidity	5%RH - 95%RH non condensing
Drop Specification	Multiple 1.5m/4.9ft drops (at least 20 times) to the concrete across the operating temperature range
	Multiple 2.4m/7.87ft drops (at least 20 times) to the concrete after installed rubber bumper
Tumble Specification	1000 x 0.5m/1.6ft falls at room temperature
Sealing	IP65 per IEC sealing specifications
ESD	±15KV air discharge, ±8KV conductive discharge

Communication

WLAN	Support 802.11 a/b/g/n/ac
	2G: 850/900/1800/1900MHz
	3G: CDMA EVDO: BC0
WWAN (Europe, Asia)	4G: TDD-LTE: B38, B39, B40, B41
	WCDMA: 850/900/1900/2100MHz
	TD-SCDMA: A/F (B34/B39)
	4G: B1, B3, B5, B7, B8, B20, B38, B39, B40, B41

Specification

Communication	
WWAN (America)	2G: 850/900/1800/1900MHz
	3G: 850/900/1900/2100MHz
	4G: B2, B4, B5, B7, B12, B17, B38
Bluetooth	Bluetooth 4.2/4.1 + HS/4.0/3.0 + HS/2.1 + EDR
GNSS	GPS/AGPS, GLONASS, BeiDou, internal antenna
Data Collection	
Camera	
Rear Camera	Rear 13MP Autofocus with flash
NFC	
Frequency	13.56 MHz
Protocol	ISO14443A/B, ISO15693, NFC-IP1, NFC-IP2, etc.
Chips	M1 card (S50, S70), CPU card, NFC tags, etc.
Range	2-4cm
UHF1 (Optional)	
Engine	CM2000-1 module based on Impinj Indy R2000
Frequency	865MHz-868MHz / 920-925MHz / 902-928MHz
Protocol	EPC C1 GEN2 / ISO18000-6C
Antenna	Circular Polarized Antenna (4dBi)
Power	1W (30dBm, +5dBm to +30dBm adjustable)
	2W (optional, 33dBm, for Lati America, etc.)
R/W Range	> 15m (open outdoors, Impinj MR6 tag)
Reading Rate	> 200 tags/s
Communication Mode	Pin Connector

UHF2 (Optional, UHF Sled)	
Engine	CM2000-1 module based on Impinj Indy R2000
Frequency	865MHz-868MHz / 920-925MHz / 902-928MHz
Protocol	EPC C1 GEN2 / ISO18000-6C
Antenna	Circular Polarized Antenna (3dBi)
Power	1W (30dBm, support +5~+30dBm adjustable)
	2W (optional, 33dBm, for Lati America, etc.)
R/W Range	> 10m(open outdoors, Impinj MR6 tag)
Reading Rate	> 200 tags/s
Communication Mode	Pin Connector / Bluetooth
*Ranges and rates depend on tags and environment	
Barcode Scanning (optional)	
2D Scanner	Zebra: SE4710 / SE2100; Honeywell: N6603
1D Symbolgies	UPC/EAN, Code128, Code39, Code93, Code11, Interleaved 2 of 5, Discrete 2 of 5, Chinese 2 of 5, Codabar, MSI, RSS, etc.
2D Symbolgies	PDF417, MicroPDF417, Composite, RSS, TLC-39, Datamatrix, QR code, Micro QR code, Aztec, MaxiCode; Postal Codes: US PostNet, US Planet, UK Postal, Australian Postal, Japan Postal, Dutch Postal (KIX),etc.
Optional Accessories (See details in Accessory Guide)	
Separate handle with one button;	
Handle + battery (handle battery 5200mAh, one button) ;	
UHF back clip + handle (5200mAh, one button) ;	
Wrist Strap; Rubber Bumper; Charging Cradle	



www.chainway.net

SHENZHEN CHAINWAY INFORMATION TECHNOLOGY CO., LTD

9F, Building2, Phase 2, Gaoxinqi Industrial Park, Liuxian 1st Rd., Bao'an District,
Shenzhen, Guangdong 518102, China

Tel: 0086-755-23223316 Fax: 0086-755-23223310

Email: sales@chainway.cn

www.chainway.net